

813/1 Quick-Release Bitholding Screwdriver



Application: For 1/4"-hexagon insert bits, DIN 3126-C 6,3

Drive: 1/4"-hexagon with quick-release bitholder

Handle: Kraffform® with anti-roll protection, three components

Code	DIN			
	inch 3126	mm		
051271	1/4" D 6,3	90		5

815/4/1 Quick-Release Bitholding Screwdriver, magnetic



Application: For 1/4"-hexagon insert bits, DIN 3126-C + E 6,3

Drive: 1/4"-hexagon with quick-release bitholder

Handle: Kraffform® with anti-roll protection, three components

Code	DIN			
	inch 3126	mm		
051470	1/4" D 6,3	103		5
	F 6,3			

816/4/1 Quick-Release Bitholding Screwdriver, magnetic



Application: For 1/4"-hexagon insert bits, DIN 3126-C + E 6,3

Drive: 1/4"-hexagon with quick-release bitholder

Handle: Kraffform® with anti-roll protection, three components

Code	DIN			
	inch 3126	mm		
051460	1/4" D 6,3	117		5
	F 6,3			

817/4/1 Bitholding Screwdriver with Bayonet Holder



Application: For 1/4"-hexagon insert bits, DIN 3126-C + E 6,3

Drive: Bayonet Holder: 1/4"-hexagon with quick-release bitholder

Handle: Kraffform® with anti-roll protection, three components

Code	DIN		A		
	inch 3126	mm	inch		
051480	1/4" D 6,3	102	4 3/4"		2
	F 6,3				

897/4/1 Bayonet Holder



Application: For 1/4"-hexagon insert bits, DIN 3126-C + E 6,3

Drive: 1/4" DIN 3126-E 6,3

Output: 1/4"-hexagon with quick-release bitholder

Code	DIN		A		
	inch 3126	mm	mm	inch	
053970	1/4" D 6,3	6	102	4"	2
	F 6,3				

98/4/1 Kraffform® Handy-Ratchet



Drive: 1/4"-hexagon DIN 3126-D 6,3, with quick-release chuck

Handle: Kraffform® with elastomer soft zones, needle bearing supported free turning ratchet, integrated switch for forward or reverse operation.

Code	A	B	A	B	
	mm	mm	inch	inch	
003263	1/4"	140	100	5 9/16" 4"	1

Wera Series 1 Bits



1/4"



DIN 3126
Form C 6,3
ISO 1173

for use with bit holder
 or for direct drive in:

- Bosch**
- Fein**
- Holz-Her**
- Lecureux**
- Metabo**



info

The right holder for every application

BiTorsion® Holder:

1 Rapidaptor® with strong permanent magnet and quick-release chuck

2, 3 and 4

with strong permanent magnet and quick-release chuck

Universal Bit Holder:


5 Rapidaptor® with quick-release chuck

6 with retaining ring

7 sleeve made from Copper-Beryllium and with strong permanent magnet

8 sleeve made from stainless steel and with strong permanent magnet

9 sleeve made from stainless steel, with retaining ring and strong permanent magnet

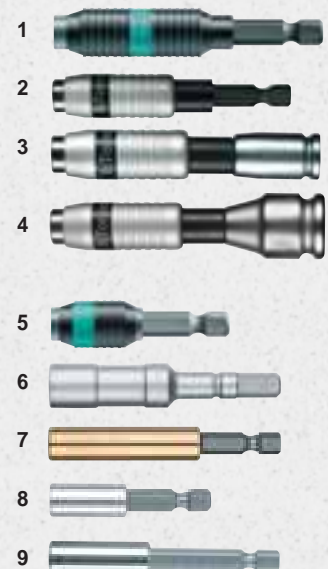


More information on page 118.

800/1 BDC Bits **BiTorsion**



Application: For slotted screws

Drive: 1/4"-hexagon,
 DIN 3126-C 6,3, ISO 1173
Tip: DIN 5264-C, ISO 2380,
 Diamond coated



Code	mm	mm	inch		
056172	0,8	5,5	25	1"	10
056174	1,0	5,5	25	1"	10
056176	1,2	6,5	25	1"	10

800/1 TZ Bits **TORSION**



Application: For slotted screws

Drive: 1/4"-hexagon,
 DIN 3126-C 6,3, ISO 1173
Tip: DIN 5264-C, ISO 2380,
 professional quality

Code	mm	mm	inch	mm	
056203	0,5	4,0	25	1"	4,0 10
056210	0,6	4,5	25	1"	4,5 10
056220	0,8	5,5	25	1"	5,5 10
056225	1,0	5,5	25	1"	5,5 10
056233	1,2	6,5	25	1"	6,2 10
056240	1,6	8,0	25	1"	8,0 10

800/1 BTH Bits **BiTorsion**



Application: For slotted screws

Drive: 1/4"-hexagon,
 DIN 3126-C 6,3, ISO 1173
Tip: DIN 5264-C, ISO 2380,
 extra hard

Code	mm	mm	inch		
056084	0,8	5,5	25	1"	10
056086	1,0	5,5	25	1"	10
056088	1,2	6,5	25	1"	10

800/1 Z Bits



Application: For slotted screws

Tip: DIN 5264-C, ISO 2380,
 professional quality

Drive: 1/4"-hexagon,
 DIN 3126-C 6,3, ISO 1173

Code	mm	mm	inch	mm	
056200	0,5	3,0	25	1"	3,0 10
072050	0,5	4,0	25	1"	4,0 10
072055	0,6	4,5	25	1"	4,5 10
072057	0,8	5,5	25	1"	5,5 10
072059	1,0	5,5	25	1"	5,5 10
072061	1,2	6,5	25	1"	6,2 10
072063	1,2	8,0	25	1"	8,0 10
072065	1,6	8,0	25	1"	8,0 10

800/1 BTZ Bits **BiTorsion**



Application: For slotted screws

Drive: 1/4"-hexagon,
 DIN 3126-C 6,3, ISO 1173
Tip: DIN 5264-C, ISO 2380,
 professional quality

Code	mm	mm	inch		
056064	0,8	5,5	25	1"	10
056066	1,0	5,5	25	1"	10
056068	1,2	6,5	25	1"	10



Information about the BiTorsion® system is provided on pages 84-85.
 Details about Torsion bits on page 86.
 Which Wera tool for which screw? See pages 154-157.

Wera Series 1 Bits

800/1 Z Bits



Application: For slotted screws

Drive: 1/4"-hexagon,
DIN 3126-C 6,3, ISO 1173
Tip: DIN 5264-C, ISO 2380,
professional quality

Code	mm	mm	inch	mm	
056005	0,5	3,0	1 17/32"	3,0	10
056007	0,5	4,0	1 17/32"	4,0	10
056010	0,6	3,5	1 17/32"	3,5	10
056015	0,6	4,5	1 17/32"	4,5	10
056020	0,8	4,0	1 17/32"	4,0	10
056025	0,8	5,5	1 17/32"	5,5	10
056030	1,0	5,5	1 17/32"	5,5	10
056037	1,2	6,5	1 17/32"	6,5	10
056040	1,2	8,0	1 17/32"	8,0	10
056045	1,6	8,0	1 17/32"	8,0	10

803 Finder Sleeves



Application: Only for use
with 800/1 Z-bits (39 mm)
and adaptor

Code	Zt	N	mm	inch	
070305	4,0	3,0	44,5	1 3/4"	5
070315	5,0	3,5	44,5	1 3/4"	5
070322	5,5	4,5	44,5	1 3/4"	5
070332	6,5	4,0	44,5	1 3/4"	5
070342	8,5	5,5	45,0	1 3/4"	5
070362	10,5	6,5	45,5	1 3/4"	5
070367	11,0	8,0	46,0	1 3/4"	5

851/1 BDC Bits **BiTorsion**



Application: For Phillips screws

Drive: 1/4"-hexagon,
DIN 3126-C 6,3, ISO 1173
Tip: DIN 5260-PH, ISO 8764-PH,
Diamond coated

Code	mm	inch	
056400	PH 1	25	1" 10
056402	PH 2	25	1" 10
056404	PH 3	25	1" 10

851/1 BTH Bits **BiTorsion**



Application: For Phillips screws

Drive: 1/4"-hexagon,
DIN 3126-C 6,3, ISO 1173
Tip: DIN 5260-PH, ISO 8764-PH,
extra hard

Code	mm	inch	
056410	PH 1	25	1" 10
056412	PH 2	25	1" 10
056414	PH 3	25	1" 10

851/1 BTZ Bits **BiTorsion**



Application: For Phillips screws

Drive: 1/4"-hexagon,
DIN 3126-C 6,3, ISO 1173
Tip: DIN 5260-PH, ISO 8764-PH,
professional quality

Code	mm	inch	
056420	PH 1	25	1" 10
056422	PH 2	25	1" 10
056424	PH 3	25	1" 10

851/1 TH Bits **TORSION**



Application: For Phillips screws

Drive: 1/4"-hexagon,
DIN 3126-C 6,3, ISO 1173
Tip: DIN 5260-PH, ISO 8764-PH,
extra hard

Code	mm	inch	
056605	PH 1	25	1" 10
056610	PH 2	25	1" 10
056625	PH 3	25	1" 10



Information about the BiTorsion® system is provided on pages 84-85.
Details about Torsion bits on page 86.
Which Wera tool for which screw? See pages 154-157.

853/1 TZ Bits, ACR TORSION



Application: For Phillips screws
Drive: 1/4"-hexagon,
 DIN 3126-C 6.3, ISO 1173

Tip: DIN 5260-PH, ISO 8764-PH,
 ACR, professional quality

Code		mm	inch	
056660	PH 1	25	1"	10
056662	PH 2	25	1"	10
056664	PH 3	25	1"	10

851/1 TZ Bits TORSION



Application: For Phillips screws

Drive: 1/4"-hexagon,
 DIN 3126-C 6.3, ISO 1173
Tip: DIN 5260-PH, ISO 8764-PH,
 professional quality

Code		mm	inch	
056505	PH 1	25	1"	10
056510	PH 2	25	1"	10
056525	PH 3	25	1"	10

851/1 TiN Bits



Application: For Phillips screws

Drive: 1/4"-hexagon,
 DIN 3126-C 6.3, ISO 1173
Tip: DIN 5260-PH, ISO 8764-PH,
 TiN coated

Code		mm	inch	
480171	PH 1	25	1"	10
480172	PH 2	25	1"	10
480173	PH 3	25	1"	10

851/1 Z Bits



Application: For Phillips screws

Drive: 1/4"-hexagon,
 DIN 3126-C 6.3, ISO 1173
Tip: DIN 5260-PH, ISO 8764-PH,
 professional quality

Code		mm	inch	
056500	PH 0	25	1"	10
072070	PH 1	25	1"	10
056507	PH 1	50	2"	10
072072	PH 2	25	1"	10
056515	PH 2	32	1 1/4"	10
056520	PH 2	50	2"	10
072074	PH 3	25	1"	10
056530	PH 3	32	1 1/4"	10
134905	PH 3	50	2"	10
056535	PH 4	32	1 1/4"	10

851/1 RDC Bits



Application:
 For Drywall screws

Drive: 1/4"-hexagon,
 DIN 3126-C 6.3, ISO 1173
Tip: Phillips with reduced shank,
 Diamond coated

Code		mm	inch	mm
135008	PH 2	25	1"	4.2 10

851/1 RZ Bits



Application:
 For Drywall screws

Drive: 1/4"-hexagon,
 DIN 3126-C 6.3, ISO 1173
Tip: Phillips with reduced shank

Code		mm	inch	mm
135009	PH 2	25	1"	4.2 10



Details about Torsion bits on page 86.
 Which Wera tool for which screw? See pages 154-157.

Wera Series 1 Bits

855/1 BDC Bits **BiTorsion**



Application: For Pozidriv screws

Drive: 1/4"-hexagon,
DIN 3126-C 6,3, ISO 1173
Tip: DIN 5260-PZ, ISO 8764-PZ,
Diamond coated



855/1 TH Bits **TORSION**



Application: For Pozidriv screws

Drive: 1/4"-hexagon,
DIN 3126-C 6,3, ISO 1173

Tip: DIN 5260-PZ, ISO 8764-PZ,
extra hard

Code		mm	inch	
056700	PZ 1	25	1"	10
056702	PZ 2	25	1"	10
056704	PZ 3	25	1"	10

Code		mm	inch	
056910	PZ 1	25	1"	10
056915	PZ 2	25	1"	10
056925	PZ 3	25	1"	10

855/1 BTH Bits **BiTorsion**



Application: For Pozidriv screws

Drive: 1/4"-hexagon,
DIN 3126-C 6,3, ISO 1173
Tip: DIN 5260-PZ, ISO 8764-PZ,
extra hard

856/1 TZ Bits, ACR **TORSION**



Application: For Pozidriv screws

Drive: 1/4"-hexagon,
DIN 3126-C 6,3, ISO 1173

Tip: DIN 5260-PZ, ISO 8764-PZ,
ACR, professional quality

Code		mm	inch	
056710	PZ 1	25	1"	10
056712	PZ 2	25	1"	10
056714	PZ 3	25	1"	10

Code		mm	inch	
056937	PZ 1	25	1"	10
056938	PZ 2	25	1"	10
056939	PZ 3	25	1"	10

855/1 BTZ Bits **BiTorsion**



Application: For Pozidriv screws

Drive: 1/4"-hexagon,
DIN 3126-C 6,3, ISO 1173
Tip: DIN 5260-PZ, ISO 8764-PZ,
professional quality

855/1 TZ Bits **TORSION**



Application: For Pozidriv screws

Drive: 1/4"-hexagon,
DIN 3126-C 6,3, ISO 1173

Tip: DIN 5260-PZ, ISO 8764-PZ,
professional quality

Code		mm	inch	
056720	PZ 1	25	1"	10
056722	PZ 2	25	1"	10
056724	PZ 3	25	1"	10

Code		mm	inch	
056810	PZ 1	25	1"	10
056815	PZ 2	25	1"	10
056825	PZ 3	25	1"	10



Information about the BiTorsion® system is provided on pages 84-85.
Details about Torsion bits on page 86.
Which Wera tool for which screw? See pages 154-157.

855/1 TiN Bits



Application: For Pozidriv screws

Drive: 1/4"-hexagon,
DIN 3126-C 6,3, ISO 1173

Tip: DIN 5260-PZ, ISO 8764-PZ,
TiN coated

Code		mm	inch		
480221	PZ 1	25	1"	10	
480222	PZ 2	25	1"	10	
480223	PZ 3	25	1"	10	

855/1 Z Bits



Application: For Pozidriv screws

Tip: DIN 5260-PZ, ISO 8764-PZ,
professional quality

Drive: 1/4"-hexagon,
DIN 3126-C 6,3, ISO 1173

Code		mm	inch		
056805	PZ 0	25	1"	10	
072080	PZ 1	25	1"	10	
056812	PZ 1	50	2"	10	
072082	PZ 2	25	1"	10	
056820	PZ 2	50	2"	10	
072084	PZ 3	25	1"	10	
056830	PZ 3	32	1 1/4"	10	
056835	PZ 4	32	1 1/4"	10	

855/1 RZ Bits



Application:

For Drywall screws

Drive: 1/4"-hexagon,
DIN 3126-C 6,3, ISO 1173

Tip: Pozidriv with reduced shank

Code		mm	inch	mm	
135003	PZ 2	25	1"	4,2	10

867/1 TORX® BDC Bits **BiTorsion®**



Application: For TORX®
socket screws

Drive: 1/4"-hexagon,
DIN 3126-C 6,3, ISO 1173

Tip: TORX®, Diamond coated

Code		mm	inch		
066100	TX 10	25	1"	10	
066102	TX 15	25	1"	10	
066104	TX 20	25	1"	10	
066106	TX 25	25	1"	10	
066108	TX 30	25	1"	10	
066110	TX 40	25	1"	10	

867/1 TORX® BTZ Bits **BiTorsion®**



Application: For TORX®
socket screws

Drive: 1/4"-hexagon,
DIN 3126-C 6,3, ISO 1173

Tip: TORX®, professional quality

Code		mm	inch		
066120	TX 10	25	1"	10	
066122	TX 15	25	1"	10	
066124	TX 20	25	1"	10	
066126	TX 25	25	1"	10	
066128	TX 30	25	1"	10	
066130	TX 40	25	1"	10	

867/1 TZ TORX® Bits **TORSION**



Application: For TORX®
socket screws

Drive: 1/4"-hexagon,
DIN 3126-C 6,3, ISO 1173

Tip: TORX®, professional quality

Code		mm	inch	mm	
066300	TX 5	25	1"	4,2	10
066301	TX 6	25	1"	4,2	10
066302	TX 7	25	1"	4,2	10
066303	TX 8	25	1"	4,2	10
066304	TX 9	25	1"	4,2	10
066305	TX 10	25	1"	4,2	10
066308	TX 15	25	1"	4,2	10
066310	TX 20	25	1"	4,8	10
066312	TX 25	25	1"	5,5	10
066313	TX 27	25	1"	5,5	10
066315	TX 30	25	1"	6,0	10
066320	TX 40	25	1"	-	10



Information about TORX® and TORX PLUS® on pages 21, 86.
TORX® = reg. Trademark of CAMCAR, Div. of Textron, Rockford IL.

Wera Series 1 Bits

867/1 Z TORX® Bits



Application: For TORX® socket screws
Drive: 1/4"-hexagon,

DIN 3126-E 6,3, ISO 1173
Tip: TORX®, professional quality

Code		mm	inch	mm	
066492	TX 5	25	1"	3,0	10
066493	TX 6	25	1"	3,0	10
066494	TX 7	25	1"	3,0	10
066495	TX 8	25	1"	3,0	10
066496	TX 9	25	1"	3,0	10
066485	TX 10	25	1"	4,0	10
066486	TX 15	25	1"	4,0	10
066487	TX 20	25	1"	5,0	10
066488	TX 25	25	1"	5,0	10
066489	TX 27	25	1"	6,0	10
066490	TX 30	25	1"	6,0	10
066491	TX 40	25	1"	-	10
066325	TX 45	35	1 3/8"	8,0	10
066330	TX 50	35	1 3/8"	9,0	10

867/1 H TORX® Bits



Application:
 For TORX PLUS® socket screws
Drive: 1/4"-hexagon,

DIN 3126-C 6,3, ISO 1173
Tip: TORX®, professional quality

Code		mm	inch	mm	
135150	TX 5	25	1"	3,0	10
135152	TX 6	25	1"	3,0	10
135154	TX 7	25	1"	3,0	10
135156	TX 8	25	1"	3,0	10
135158	TX 9	25	1"	3,0	10
135160	TX 10	25	1"	4,0	10
135161	TX 15	25	1"	4,0	10

867/1 Z TORX® W Bits



Application:
 For TORX® socket screws
Drive: 1/4"-hexagon,

DIN 3126-C 6,3, ISO 1173
Tip: TORX®, conical form, professional quality (W=Wedge TORX®)

Code		mm	inch		
066450	TX 10	25	1"		10
066455	TX 15	25	1"		10
066460	TX 20	25	1"		10
066465	TX 25	25	1"		10
066470	TX 27	25	1"		10
066475	TX 30	25	1"		10
066480	TX 40	25	1"		10

867/1 Z TORX® BO Bits



Application: For TORX® socket screws (BO = tamper resistant)

Drive: 1/4"-hexagon,
 DIN 3126-C 6,3, ISO 1173
Tip: TORX®, with bore hole, professional quality

Code		mm	inch	
066497	TX 7	25	1"	10
066498	TX 8	25	1"	10
066499	TX 9	25	1"	10
066500	TX 10	25	1"	10
066505	TX 15	25	1"	10
066510	TX 20	25	1"	10
066515	TX 25	25	1"	10
066520	TX 27	25	1"	10
066525	TX 30	25	1"	10
066530	TX 40	25	1"	10

867/1 Z IP TORX^{plus} Bits



Application:
 For TORX PLUS® socket screws

Drive: 1/4"-hexagon,
 DIN 3126-C 6,3, ISO 1173
Tip: TORX PLUS®, professional quality

Code		mm	inch	
066272	5 IP	25	1"	10
066274	6 IP	25	1"	10
066276	7 IP	25	1"	10
066278	8 IP	25	1"	10
066279	9 IP	25	1"	10
066280	10 IP	25	1"	10
066282	15 IP	25	1"	10
066284	20 IP	25	1"	10
066286	25 IP	25	1"	10
066287	27 IP	25	1"	10
066288	30 IP	25	1"	10
066290	40 IP	25	1"	10



Which Wera tool for which screw? See pages 154-157.
 Information about TORX® and TORX PLUS® on pages 21, 86.
 TORX® and TORX PLUS® = reg. Trademarks of CAMCAR, Div. of Textron, Rockford IL.

840/1 Z Bits Hex-Plus®



Application:
For hexagon socket screws
Drive: 1/4"-hexagon,

DIN 3126-C 6.3, ISO 1173
Tip: Hex-Plus, similar to ISO 2936,
professional quality

Code	mm	mm	inch		
056303	1.5	25	1"	10	
056305	2.0	25	1"	10	
056310	2.5	25	1"	10	
056315	3.0	25	1"	10	
056320	4.0	25	1"	10	
056325	5.0	25	1"	10	
056330	6.0	25	1"	10	
056332	7.0	25	1"	10	
056335	8.0	25	1"	10	
056340	10.0	25	1"	10	
135070	1/16"	25	1"	10	
135071	5/64"	25	1"	10	
135072	3/32"	25	1"	10	
135078	7/64"	25	1"	10	
135073	1/8"	25	1"	10	
135069	9/64"	25	1"	10	
135074	5/32"	25	1"	10	
135075	3/16"	25	1"	10	
135079	7/32"	25	1"	10	
135076	1/4"	25	1"	10	
135077	5/16"	25	1"	10	
135068	3/8"	25	1"	10	

864/1 Z SIT Bits



Application: For ASSY®, piас-
screws
Drive: 1/4"-hexagon,

DIN 3126-C 6.3, ISO 1173
Tip: SIT, professional quality

Code	mm	mm	inch		
066030	SIT 10	25	1"	10	
066031	SIT 20	25	1"	10	
066032	SIT 25	25	1"	10	
066033	SIT 30	25	1"	10	
066034	SIT 40	25	1"	10	

840/1 Z Hex-Plus® BO Bits



Application:
For hexagon socket screws

Drive: 1/4"-hexagon,
DIN 3126-C 6.3, ISO 1173
Tip: Hex-Plus with bore hole, sim-
ilar to ISO 2936, professional quality

Code	mm	mm	inch		
056341	2.0	25	1"	10	
056342	2.5	25	1"	10	
056343	3.0	25	1"	10	
056344	4.0	25	1"	10	
056345	5.0	25	1"	10	
056346	6.0	25	1"	10	

864/1 BTZ SIT Bits BiTorsion



Application: For ASSY®, piас-
screws
Drive: 1/4"-hexagon,

DIN 3126-C 6.3, ISO 1173
Tip: SIT, professional quality

Code	mm	inch		
066040	SIT 10	25	1"	10
066041	SIT 20	25	1"	10
066042	SIT 25	25	1"	10
066043	SIT 30	25	1"	10

842/1 Z Bits



Application: For hexagon socket
screws

Drive: 1/4"-hexagon,
DIN 3126-C 6.3, ISO 1173
Tip: hexagon ball,
professional quality

Code	mm	mm	inch		
056350	2.5	25	1"	10	
056352	3.0	25	1"	10	
056354	4.0	25	1"	10	
056356	5.0	25	1"	10	
056358	6.0	25	1"	10	



Information about Hex-Plus is provided on page 58.
Information about SIT-tools on page 19.
Information about BiTorsion® on pages 84-85.
Which Wera tool for which screw? See pages 154-157.

Wera Series 1 Bits



Toll-Free 1-866-763-6226 Phone: 905-672-5557
Fax: 905-672-5559 Email: sales@dobcoeqp.com

857/1 Z Spanner Bits



Application: For Spanner screws

Drive: 1/4"-hexagon,

DIN 3126-C 6,3, ISO 1173

Tip: Spanner,

professional quality

Code	mm	inch	mm	
057150	4	25	1"	3,18 10
057151	6	25	1"	4,32 10
057152	8	25	1"	5,21 10
057153	10	25	1"	6,10 10

860/1 XZN Bits



Application: For XZN screws

Drive: 1/4"-hexagon,

DIN 3126-C 6,3, ISO 1173

Tip: XZN, professional quality

Code	mm	inch	mm	
066150	M 4	25	1"	4,17 10
066155	M 5	25	1"	5,14 10
066160	M 6	25	1"	- 10
066165	M 8	25	1"	8,0 5
066170	M 10	25	1"	10,0 5

868/1 BTZ Square-Plus Bits **BiTorsion**



Application:

For square socket head screws


Drive: 1/4"-hexagon,

DIN 3126-C 6,3, ISO 1173

Tip: Square-Plus, professional quality

Code	mm	inch	mm	
066445	# 1	25	1"	4,2 10
066446	# 2	25	1"	4,2 10
066447	# 3	25	1"	5,5 10

871/1 DC TORQ-SET® Mplus Bits



Application:

For TORQ-SET®-screws

Drive: 1/4"-hexagon,

DIN 3126-C 6,3, ISO 1173

Tip: TORQ-SET® Mplus,

similar ISO 7994,

Diamond coated

Code	mm	inch	mm	
066640	6	25	1"	4,7 10
066642	8	25	1"	6,0 10
066644	10	25	1"	6,0 10
066646	1/4"	32	1 1/4"	11,0 10

868/1 Z Square-Plus Bits



Application:

For square socket head screws

Drive: 1/4"-hexagon,

DIN 3126-C 6,3, ISO 1173

Tip: Square-Plus, professional quality

Code	mm	inch	mm	
066395	# 00	25	1"	3,5 10
066400	# 0	25	1"	3,5 10
066405	# 1	25	1"	4,5 10
066410	# 2	25	1"	6,0 10
066415	# 3	25	1"	6,0 10
066420	# 4	25	1"	8,0 10



Information about BiTorsion® on pages 84-85.

871/1 TORQ-SET® Mplus Bits, 25 mm



Application:
 For TORQ-SET®-screws
Drive: 1/4"-hexagon,
 DIN 3126-C 6,3, ISO 1173

Tip: TORQ-SET® Mplus
 similar ISO 7994, professional
 quality

Code	mm	inch	mm	mm	mm
066618	0	25	1"	4,7	10
066619	1	25	1"	4,7	10
066620	2	25	1"	4,7	10
066622	3	25	1"	4,7	10
066624	4	25	1"	4,7	10
066626	5	25	1"	4,7	10
066628	6	25	1"	4,7	10
066630	8	25	1"	6,0	10
066632	10	25	1"	6,0	10
066633	1/4"	25	1"	-	10

871/1 TORQ-SET® Mplus Bits, Bull'Nose



Application:
 For TORQ-SET®-screws
Drive: 1/4"-hexagon,
 DIN 3126-C 6,3, ISO 1173

Tip: TORQ-SET® Mplus
 similar ISO 7994, professional
 quality

Code	mm	inch	mm	mm	mm
066634	1/4"	32	1 1/4"	11,0	10
066635	5/16"	32	1 1/4"	11,0	10

875/1 TRI-WING® Bits, 25 mm



Application:
 For TRI-WING®-screws
Drive: 1/4"-hexagon,

DIN 3126-C 6,3, ISO 1173
Tip: TRI-WING®,
 professional quality

Code	mm	inch	mm	mm	mm
066758	0	25	1"	4,7	10
066760	1	25	1"	4,7	10
066762	2	25	1"	4,7	10
066764	3	25	1"	4,7	10
066766	4	25	1"	6,2	10
066768	5	25	1"	6,2	10

875/1 TRI-WING® Bits, Bull'Nose



Application:
 For TRI-WING®-screws
Drive: 1/4"-hexagon,

DIN 3126-C 6,3, ISO 1173
Tip: TRI-WING®,
 professional quality

Code	mm	inch	mm	mm	mm
066770	6	32	1 1/4"	11,0	10
066772	7	32	1 1/4"	11,0	10
066774	8	32	1 1/4"	12,5	10



Information about TRI-WING® is provided on page 87.
 Which Wera tool for which screw? See pages 154-157.

TORQ-SET® and TRI-WING® = reg. Trademarks of Phillips Screw Company.

Wera Series 2 Bits



5/16"



**DIN 3126
 Form C 8
 ISO 1173**

for use with bit holder
 or for direct drive in:

**Bosch
 Fein
 Holz-Her
 Lecureux
 Metabo**

851/2 Z Bits



Application: For Phillips screws

Drive: 5/16"-hexagon,
 DIN 3126-C 8, ISO 1173

Tip: DIN 5260-PH, ISO 8764-PH,
 professional quality

Code		mm	inch	mm		
057705	PH 1	32	1 1/4"	4,5	10	
057710	PH 2	32	1 1/4"	6,0	10	
057715	PH 3	32	1 1/4"	7,6	10	
057720	PH 4	32	1 1/4"	-	10	
057725	PH 4	38	1 1/2"	10,0	10	

800/2 Z Bits



Application: For slotted screws
Drive: 5/16"-hexagon,
 DIN 3126-C 8, ISO 1173

Tip: DIN 5264-C, ISO 2380,
 professional quality

Code	mm	mm	inch	mm		
057210	0,8 5,5	41	1 19/32"	5,5	10	
057213	1,0 5,5	41	1 19/32"	5,5	10	
057223	1,2 6,5	41	1 19/32"	6,5	10	
057225	1,2 8,0	41	1 19/32"	7,82	10	
057230	1,6 8,0	41	1 19/32"	7,82	10	
057235	1,6 10,0	41	1 19/32"	10,0	10	
057240	2,0 12,0	41	1 19/32"	12,0	10	
057250	2,5 14,0	41	1 19/32"	14,0	10	
057255	*2,5 16,0	41	1 19/32"	16,0	10	

855/2 Z Bits



Application: For Pozidriv screws

Drive: 5/16"-hexagon,
 DIN 3126-C 8, ISO 1173

Tip: DIN 5260-PZ, ISO 8764-PZ,
 professional quality

Code		mm	inch	mm		
058005	PZ 1	32	1 1/4"	4,5	10	
058010	PZ 2	32	1 1/4"	6,0	10	
058015	PZ 3	32	1 1/4"	7,6	10	
058020	PZ 4	32	1 1/4"	-	10	
058025	PZ 4	38	1 1/2"	10,0	10	

* These sizes are not included in standard specifications.
 TORX®= reg. Trademark of CAMCAR, Div. of Textron, Rockford IL.

867/2 Z TORX® Bits



Application: For TORX® socket screws

Drive: 5/16"-hexagon, DIN 3126-C 8, ISO 1173

Tip: TORX® professional quality

871/2 TORQ-SET® Mplus Bits



Application: For TORQ-SET®-screws

Drive: 5/16"-hexagon, DIN 3126-C 8, ISO 1173

Tip: TORQ-SET® Mplus, similar ISO 7994

Code		mm	inch	mm	
066901	TX 20	35	1 3/8"	4,5	10
066900	TX 25	35	1 3/8"	5,8	10
066902	TX 27	35	1 3/8"	5,8	10
066905	TX 30	35	1 3/8"	6,0	10
066910	TX 40	35	1 3/8"	7,0	10
066915	TX 45	35	1 3/8"	-	10
066920	TX 50	35	1 3/8"	-	10
066925	TX 55	35	1 3/8"	12,0	10
136220	TX 60	35	1 3/8"	14,0	10

Code		mm	inch	
066650	8	32	1 1/4"	5
066652	10	32	1 1/4"	5
066654	1/4"	32	1 1/4"	5
066656	5/16"	32	1 1/4"	5
066658	3/8"	32	1 1/4"	5

840/2 Z Bits Hex-Plus®



Application: For hexagon socket screws

Drive: 5/16"-hexagon, DIN 3126-C 8, ISO 1173

Tip: Hex-Plus, similar ISO 2936, professional quality

Code	mm/inch	mm	inch	
057505	3	30	1 3/16"	10
057510	4	30	1 3/16"	10
057515	5	30	1 3/16"	10
057520	6	30	1 3/16"	10
057525	8	30	1 3/16"	10
057530	10	30	1 3/16"	10
221102	5/32"	30	1 3/16"	10
135083	3/16"	30	1 3/16"	10
135084	7/32"	30	1 3/16"	10
135080	1/4"	30	1 3/16"	10
135081	5/16"	30	1 3/16"	10
135082	3/8"	30	1 3/16"	10



Information about TORX® and TORX PLUS® on pages 21, 86.
 Information about Hex-Plus is provided on page 58.
 Information about TORQ-SET® Mplus can be found on page 87.
 Which Wera tool for which screw? See pages 154-157.

TORQ-SET® = reg. Trademark of Phillips Screw Company
 TORX® = reg. Trademark of CAMCAR, Div. of Textron, Rockford IL

Wera Series 4 Bits



1/4"



**DIN 3126,
Form E 6,3,
ISO 1173**

for use with bit holder
or for direct drive in:

- AEG**
- ARO**
- Atlas-Copco**
- Biax**
- Black & Decker**
- Bosch**
- Buckeye-Tools**
- Chicaco Pneumatic**
- Cleco**
- Deprag**
- Desoutter**
- Gardner-Denver**
- Hios (Ferra-Tools)**
- Hitachi**
- Ingersoll-Rand**
- Iwema (Fuji Air Tools)**
- Keller**
- Makita**
- Mall**
- Metabo**
- NPK-Air Tools**
- Pneutec**
- Rockwell**
- Rotor Tool**
- Skil Tool**
- Stanley**
- Thor Power-Tool**
- Tohnichi**
- Uryu (UPT-Weiler)**
- Van Dorn**
- Virax**
- Wolf**




info

The right holder for every application

BiTorsion® Holder:

With strong permanent magnet and quick-release chuck



More information on page 116.

800/4 Z Bits



Application: For slotted screws

Drive: 1/4"-hexagon,
 DIN 3126-E 6,3, ISO 1173
Tip: DIN 5264-C, ISO 2380,
 professional quality

Code	mm	mm	inch	mm	
059305	0,5	3,0	50	2"	3,0 10
059466	0,5	3,0	70	2 3/4"	3,0 10
059307	0,5	4,0	50	2"	4,0 10
059310	0,6	3,5	50	2"	3,5 10
059472	0,6	3,5	70	2 3/4"	3,5 10
059450	0,6	3,5	152	6"	3,5 10
059315	0,6	4,5	50	2"	4,5 10
059489	0,6	4,5	89	3 1/2"	4,5 10
059320	0,8	4,0	50	2"	4,0 10
059478	0,8	4,0	70	2 3/4"	4,0 10
059480	0,8	4,0	89	3 1/2"	4,0 10
059451	0,8	4,0	152	6"	4,0 10
059325	0,8	5,5	50	2"	5,5 10
059330	1,0	5,5	50	2"	5,5 10
059486	1,0	5,5	70	2 3/4"	5,5 10
059488	1,0	5,5	89	3 1/2"	5,5 10
059452	1,0	5,5	152	6"	5,5 10
059335	1,0	6,0	50	2"	6,0 10
059337	1,2	6,5	50	2"	6,2 10
059492	1,2	6,5	70	2 3/4"	6,2 10
059490	1,2	6,5	89	3 1/2"	6,2 10
059453	1,2	6,5	152	6"	6,2 10
059340	1,2	8,0	50	2"	8,0 10
059496	1,2	8,0	89	3 1/2"	8,0 10
059345	1,6	8,0	50	2"	8,0 10
059500	1,6	8,0	89	3 1/2"	8,0 10

807/4 Z Bits



Application: For slotted screws
 with integrated finder sleeve

Drive: 1/4"-hexagon,
 DIN 3126-E 3,6, ISO 1173
Tip: DIN 5264-C, ISO 2380,
 professional quality

Code	mm	mm	inch	mm	
059503	0,8	4,0	90	3 1/2"	10 5
059507	1,0	5,5	90	3 1/2"	11 5
059515	1,2	8,0	90	3 1/2"	13 5
059517	1,6	8,0	90	3 1/2"	13 5

851/4 BDC Bits **BiTorsion**



Application: For Phillips screws

Drive: 1/4"-hexagon,
 DIN 3126-E 3,6, ISO 1173
Tip: DIN 5260-PH, ISO 8764-PH,
 Diamond coated

Code		mm	inch	
059530	PH 1	50	2"	10
059532	PH 2	50	2"	10
059534	PH 3	50	2"	10

851/4 BTH Bits **BiTorsion**



Application: For Phillips screws

Drive: 1/4"-hexagon,
 DIN 3126-E 3,6, ISO 1173
Tip: DIN 5260-PH, ISO 8764-PH,
 extra hard

Code		mm	inch	
059540	PH 1	50	2"	10
059542	PH 2	50	2"	10
059544	PH 3	50	2"	10

851/4 BTZ Bits **BiTorsion**



Application: For Phillips screws

Drive: 1/4"-hexagon,
 DIN 3126-E 3,6, ISO 1173
Tip: DIN 5260-PH, ISO 8764-PH,
 professional quality

Code		mm	inch	
059550	PH 1	50	2"	10
059552	PH 2	50	2"	10
059554	PH 3	50	2"	10



Wera Series 4 Bits

851/4 TH Bits **TORSION**



Application: For Phillips screws

Drive: 1/4"-hexagon,
DIN 3126-E 6,3, ISO 1173

Tip: DIN 5260-PH, ISO 8764-PH,
extra hard

Code		mm	inch	
059855	PH 1	50	2"	10
059860	PH 2	50	2"	10
059865	PH 3	50	2"	10

855/4 BDC Bits **BiTorsion**



Application: For Pozidriv screws

Drive: 1/4"-hexagon,
DIN 3126-E 3,6, ISO 1173

Tip: DIN 5260-PZ, ISO 8764-PZ,
Diamond coated

Code		mm	inch	
059900	PZ 1	50	2"	10
059902	PZ 2	50	2"	10
059904	PZ 3	50	2"	10

851/4 TZ Bits **TORSION**



Application: For Phillips screws

Drive: 1/4"-hexagon,
DIN 3126-E 6,3, ISO 1173

Tip: DIN 5260-PH,
professional quality

Code		mm	inch	
059805	PH 1	50	2"	10
059810	PH 2	50	2"	10
059815	PH 3	50	2"	10

855/4 BTH Bits **BiTorsion**



Application: For Pozidriv screws

Drive: 1/4"-hexagon,
DIN 3126-E 3,6, ISO 1173

Tip: DIN 5260-PZ, ISO 8764-PZ,
extra hard

Code		mm	inch	
059910	PZ 1	50	2"	10
059912	PZ 2	50	2"	10
059914	PZ 3	50	2"	10

851/4 Z Bits



Application: For Phillips screws

Drive: 1/4"-hexagon,
DIN 3126-E 6,3, ISO 1173

Tip: DIN 5260-PH, ISO 8764-PH,
professional quality

Code		mm	inch	mm	
059755	PH 1	70	2 3/4"	4,5	10
059760	PH 1	89	3 1/2"	4,5	10
059765	PH 1	127	5"	4,5	10
059766	PH 1	152	6"	4,5	10
059770	PH 2	70	2 3/4"	6,0	10
059775	PH 2	89	3 1/2"	6,0	10
059780	PH 2	110	4 3/8"	6,0	10
059785	PH 2	127	5"	6,0	10
059786	PH 2	152	6"	6,0	10
059790	PH 3	70	2 3/4"	-	10
059795	PH 3	89	3 1/2"	-	10
059800	PH 3	110	4 3/8"	-	10
059802	PH 3	152	6"	-	10

855/4 BTZ Bits **BiTorsion**



Application: For Pozidriv screws

Drive: 1/4"-hexagon,
DIN 3126-E 3,6, ISO 1173

Tip: DIN 5260-PZ, ISO 8764-PZ,
professional quality

Code		mm	inch	
059920	PZ 1	50	2"	10
059922	PZ 2	50	2"	10
059924	PZ 3	50	2"	10

855/4 TH Bits **TORSION**



Application: For Pozidriv screws
Drive: 1/4"-hexagon, DIN 3126-E 6,3, ISO 1173
Tip: DIN 5260-PZ, ISO 8764-PZ, extra hard

Code		mm	inch		
060055	PZ 1	50	2"	10	
060060	PZ 2	50	2"	10	
060065	PZ 3	50	2"	10	

855/4 TZ Bits **TORSION**



Application: For Pozidriv screws
Drive: 1/4"-hexagon, DIN 3126-E 6,3, ISO 1173
Tip: DIN 5260-PZ, ISO 8764-PZ, professional quality

Code		mm	inch		
060005	PZ 1	50	2"	10	
060010	PZ 2	50	2"	10	
060015	PZ 3	50	2"	10	

855/4 Z Bits



Application: For Pozidriv screws
Drive: 1/4"-hexagon, DIN 3126-E 6,3, ISO 1173
Tip: DIN 5260-PZ, ISO 8764-PZ, professional quality

Code		mm	inch	mm	
060027	PZ 1	70	2 3/4"	4,5	10
060029	PZ 1	89	3 1/2"	4,5	10
060031	PZ 1	127	5"	4,5	10
060030	PZ 1	152	6"	4,5	10
060033	PZ 2	70	2 3/4"	6,0	10
060035	PZ 2	89	3 1/2"	6,0	10
060037	PZ 2	110	4 3/8"	6,0	10
060036	PZ 2	127	5"	6,0	10
060038	PZ 2	152	6"	6,0	10
060041	PZ 3	70	2 3/4"	-	10
060043	PZ 3	89	3 1/2"	-	10
060045	PZ 3	110	4 3/8"	-	10
060047	PZ 3	152	6"	-	10

Extra long.

Bits of Wera Series 4 are available in different lengths. Slotted, Phillips, Pozidriv, TORX®, 70, 89, 110, 127 and 152 mm. See pages 101, 102, 103, 104, 105.



Wera Series 4 Bits



Toll-Free 1-866-763-6226 Phone: 905-672-5557
 Fax: 905-672-5559 Email: sales@dobcoeqp.com

867/4 Z TORX® Bits



Application: For TORX® socket screws

Drive: 1/4"-hexagon, DIN 3126-E 3,6, ISO 1173

Tip: TORX®, professional quality

867/4 H TORX® Bits



Application: For TORX® socket screws

Drive: 1/4"-hexagon, DIN 3126-E 3,6, ISO 1173

Tip: TORX®, professional quality

Code	mm	inch	mm		
135204	TX 4	50	2"	3,0	10
135205	TX 5	50	2"	3,0	10
308428	TX 6	50	2"	3,0	10
134740	TX 6	70	2 3/4"	3,0	10
332600	TX 6	89	3 1/2"	3,0	10
328448	TX 6	152	6"	3,0	10
060131	TX 8	50	2"	3,0	10
060098	TX 8	70	2 3/4"	3,0	10
060185	TX 8	89	3 1/2"	3,0	10
060195	TX 8	152	6"	3,0	10
060132	TX 10	50	2"	4,0	10
060100	TX 10	70	2 3/4"	4,0	10
060186	TX 10	89	3 1/2"	4,0	10
060196	TX 10	152	6"	4,0	10
060133	TX 15	50	2"	4,0	10
060105	TX 15	70	2 3/4"	4,0	10
060187	TX 15	89	3 1/2"	4,0	10
060197	TX 15	152	6"	4,0	10
060134	TX 20	50	2"	4,5	10
060110	TX 20	70	2 3/4"	4,5	10
060188	TX 20	89	3 1/2"	4,5	10
060198	TX 20	152	6"	4,5	10
060135	TX 25	50	2"	6,0	10
060115	TX 25	70	2 3/4"	6,0	10
060189	TX 25	89	3 1/2"	6,0	10
060199	TX 25	152	6"	6,0	10
060136	TX 27	50	2"	6,0	10
060120	TX 27	70	2 3/4"	6,0	10
060190	TX 27	89	3 1/2"	6,0	10
060200	TX 27	152	6"	6,0	10
060137	TX 30	50	2"	6,0	10
060125	TX 30	70	2 3/4"	6,0	10
060191	TX 30	89	3 1/2"	6,0	10
060201	TX 30	152	6"	6,0	10
060138	TX 40	50	2"	-	10
060130	TX 40	70	2 3/4"	-	10
060192	TX 40	89	3 1/2"	-	10
060202	TX 40	152	6"	-	10

Code	mm	inch	mm		
135170	TX 5	50	2"	3,0	10
135171	TX 5	70	2 3/4"	3,0	10
135172	TX 6	50	2"	3,0	10
135180	TX 6	70	2 3/4"	3,0	10
135173	TX 7	50	2"	3,0	10
135175	TX 7	70	2 3/4"	3,0	10
135174	TX 8	50	2"	3,0	10
135182	TX 8	70	2 3/4"	3,0	10
135177	TX 9	50	2"	3,0	10
135178	TX 9	70	2 3/4"	3,0	10
135176	TX 10	50	2"	4,0	10
135184	TX 10	70	2 3/4"	4,0	10
135185	TX 15	50	2"	4,0	10
135186	TX 15	70	2 3/4"	4,0	10

867/4 Z TORX® BO Bits Tamper resistant



Application: For Resis-TORX® socket screws

Drive: 1/4"-hexagon, DIN 3126-E 3,6, ISO 1173

Tip: TORX® with bore hole, professional quality

Code	mm	inch			
060139	TX 8	70	2 3/4"	3,0	10
060048	TX 8	89	3 1/2"	3,0	10
060049	TX 9	89	3 1/2"	3,0	10
060140	TX 10	70	2 3/4"	4,0	10
060050	TX 10	89	3 1/2"	4,0	10
060141	TX 15	70	2 3/4"	4,0	10
060051	TX 15	89	3 1/2"	4,0	10
060142	TX 20	70	2 3/4"	4,5	10
060052	TX 20	89	3 1/2"	4,5	10
060143	TX 25	70	2 3/4"	6,0	10
060053	TX 25	89	3 1/2"	6,0	10
060144	TX 27	70	2 3/4"	6,0	10
060057	TX 27	89	3 1/2"	6,0	10
060145	TX 30	70	2 3/4"	6,0	10
060054	TX 30	89	3 1/2"	6,0	10
060146	TX 40	70	2 3/4"	-	10
060056	TX 40	89	3 1/2"	-	10



Details about Torsion bits on page 86.


TORX® = reg. Trademark of CAMCAR, Div. of Textron, Rockford IL



Information about Hex-Plus is provided on page 58.

TORX® and TORX® PLUS = reg. Trademark of CAMCAR, Div. of Textron, Rockford IL

867/4 Z IP TORX^{plus} Bits



Application:
 For TORX PLUS[®] socket screws,

Drive: 1/4"-hexagon,
 DIN 3126-E 6,3, ISO 1173
Tip: TORX PLUS[®],
 professional quality

Code	mm	inch	mm	mm	mm
134680	6 IP	50	2"	3,0	10
134681	7 IP	50	2"	3,0	10
134679	8 IP	50	2"	3,0	10
134670	8 IP	89	3 1/2"	3,0	10
160917	9 IP	50	2"	3,0	10
134669	9 IP	89	3 1/2"	3,0	10
134683	10 IP	50	2"	4,0	10
134684	10 IP	70	2 3/4"	4,0	10
134671	10 IP	89	3 1/2"	4,0	10
134685	15 IP	50	2"	4,0	10
134686	15 IP	70	2 3/4"	4,0	10
134672	15 IP	89	3 1/2"	4,0	10
134687	20 IP	50	2"	4,5	10
134688	20 IP	70	2 3/4"	4,5	10
134673	20 IP	89	3 1/2"	4,5	10
134674	25 IP	89	3 1/2"	6,0	10
134675	27 IP	89	3 1/2"	6,0	10
134676	30 IP	89	3 1/2"	6,0	10
134677	40 IP	89	3 1/2"	-	10

840/4 Z Bits Hex-Plus[®]



Application:
 For hexagon socket screws
Drive: 1/4"-hexagon,

DIN 3126-E 3,6, ISO 1173
Tip: Hex-Plus, similar ISO 2936,
 professional quality

Code	mm/inch	mm	inch	mm	mm
059603	2,0	50	2"	4,0	10
059604	2,5	50	2"	4,0	10
059605	3,0	50	2"	4,0	10
059630	3,0	89	3 1/2"	4,0	10
059610	4,0	50	2"	5,0	10
059631	4,0	89	3 1/2"	5,0	10
059615	5,0	50	2"	6,0	10
059632	5,0	89	3 1/2"	6,0	10
059620	6,0	50	2"	5,0	10
059633	6,0	89	3 1/2"	-	10
059625	8,0	50	2"	-	10
135091	5/64"	50	2"	3,0	10
135092	3/32"	50	2"	3,0	10
135093	7/64"	50	2"	3,5	10
135094	1/8"	50	2"	4,0	10
135095	9/64"	50	2"	4,5	10
135096	5/32"	50	2"	5,0	10
135097	3/16"	50	2"	6,0	10
135098	7/32"	50	2"	-	10
135099	1/4"	50	2"	-	10

840/4 Z Bits Hex-Plus[®] BO



Application:
 For hexagon socket screws
Drive: 1/4"-hexagon,
 DIN 3126-E 3,6, ISO 1173

Tip: Hex-Plus, similar ISO 2936,
 with bore hole,
 professional quality

Code	mm/inch	mm	inch	mm	mm
059640	2,0	89	3 1/2"	4,0	5
059641	2,5	89	3 1/2"	4,0	5
059642	3,0	89	3 1/2"	4,0	5
059643	4,0	89	3 1/2"	5,0	5
059644	5,0	89	3 1/2"	6,0	5
059645	6,0	89	3 1/2"	-	5



Information about Hex-Plus is provided on page 58.

TORX[®] and TORX[®] PLUS = reg. Trademark of CAMCAR, Div. of Textron, Rockford IL.

Wera Series 4 Bits

868/4 Z Square-Plus Bits



Application:

For square socket head screws

Drive: 1/4"-hexagon,

DIN 3126-E 3,6, ISO 1173

Tip: Square-Plus, professional quality

Code		mm	inch	mm	
060150	# 00	50	2"	3,5	10
060155	# 0	50	2"	3,5	10
060160	# 1	50	2"	4,5	10
060180	# 1	70	2 3/4"	4,5	10
134800	# 1	89	3 1/2"	4,5	10
134805	# 1	152	6"	4,5	10
060165	# 2	50	2"	6,0	10
060182	# 2	70	2 3/4"	6,0	10
134801	# 2	89	3 1/2"	6,0	10
134806	# 2	152	6"	6,0	10
060170	# 3	50	2"	6,0	10
060184	# 3	70	2 3/4"	6,0	10
134802	# 3	89	3 1/2"	6,0	10
134807	# 3	152	6"	6,0	10
060175	# 4	50	2"	8,0	10

869/4 Nut Setters



Application: For hexagon

headed bolts, screws and nuts

Drive: DIN 3126-E 6,3

Tip: External hexagon, DIN 475/2

Code		mm	inch	mm	
060272		5,5	65	2 1/2"	9,5 5
060274		6,0	65	2 1/2"	11,0 5
060276		7,0	65	2 1/2"	11,0 5
060278		8,0	65	2 1/2"	12,5 5
060280		9,0	65	2 1/2"	14,0 5
060282		10,0	65	2 1/2"	14,0 5
060281		11,0	65	2 1/2"	16,0 5
060283		12,0	65	2 1/2"	17,0 5
060284		13,0	65	2 1/2"	19,0 5
060286		1/4"	65	2 1/2"	11,0 5
060290		5/16"	65	2 1/2"	12,5 5
060288		3/8"	65	2 1/2"	14,0 5

868/4 BTZ Square-Plus Bits **BiTorsion**



Application:

For square socket head screws

Drive: 1/4"-hexagon,

DIN 3126-E 6,3, ISO 1173

Tip: Square-Plus, professional quality

Code		mm	inch	mm	
060147	# 1	50	2"	4,2	10
060148	# 2	50	2"	4,2	10
060149	# 3	50	2"	5,5	10

869/4 M Magnetic Nut Setters



Application: For hexagon

headed bolts, screws and nuts

Drive: DIN 3126-E 6,3

Tip: External hexagon, DIN 475/2 with strong permanent magnet

Code		mm	inch	mm	
060210		5,5	65	2 1/2"	9,5 5
060215		6,0	65	2 1/2"	11,0 5
060220		7,0	65	2 1/2"	11,0 5
060225		8,0	65	2 1/2"	12,5 5
060230		9,0	65	2 1/2"	14,0 5
060235		10,0	65	2 1/2"	14,0 5
060237		11,0	65	2 1/2"	16,0 5
060238		12,0	65	2 1/2"	17,0 5
060240		13,0	65	2 1/2"	19,0 5
060255		1/4"	65	2 1/2"	11,0 5
060260		5/16"	65	2 1/2"	12,5 5
060265		3/8"	65	2 1/2"	14,0 5



Information about the BiTorsion® system is provided on pages 84-85.
 Information about Hex-Plus is provided on page 58.

ASSY®, pics and SIT = reg. Trademarks of Adolf Würth GmbH & Co. KG, Künzelsau

860/4 XZN Bits



Application:
For XZN screws

Drive: 1/4"-hexagon,
DIN 3126-E 6,3, ISO 1173
Tip: XZN, professional quality

Code	mm	inch	mm	
066175	M 4	50	2"	4,17 10
066180	M 5	50	2"	5,14 10
066185	M 6	50	2"	- 10
066190	M 8	50	2"	8,0 5
066195	M 10	50	2"	10,0 5
066200	M 12	50	2"	12,0 5

871/4 DC TORQ-SET® Mplus Bits



Application:
For TORQ-SET®-screws
Drive: 1/4"-hexagon,
DIN 3126-E 6,3, ISO 1173

Tip: TORQ-SET® Mplus,
similar ISO 7994,
Diamond coated

Code	mm	inch	
066690	6	50	2" 10
066692	8	50	2" 10
066694	10	50	2" 10
066696	1/4"	50	2" 10

871/4 TORQ-SET® Mplus Bits



Application:
For TORQ-SET®-screws
Drive: 1/4"-hexagon,
DIN 3126-E 6,3, ISO 1173

Tip: TORQ-SET® Mplus,
similar ISO 7994, professional
quality

Code	mm	inch	
066660	2	50	2" 10
066683	2	89	3 1/2" 5
066662	3	50	2" 10
066684	3	89	3 1/2" 5
066664	4	50	2" 10
066685	4	89	3 1/2" 5
066666	5	50	2" 10
066668	6	50	2" 10
066676	6	70	2 3/4" 5
066686	6	89	3 1/2" 5
066670	8	50	2" 10
066678	8	70	2 3/4" 5
066687	8	89	3 1/2" 5
066672	10	50	2" 10
066680	10	70	2 3/4" 5
066682	10	89	3 1/2" 5
066674	1/4"	50	2" 10
221110	5/16"	50	2" 10

864/4 Z SIT Bits



Application: For ASSY®, piac-
screws
Drive: 1/4"-hexagon,

DIN 3126-E 6,3, ISO 1173
Tip: SIT, professional quality

Code	mm	inch	
066035	SIT10	50	2" 10
066036	SIT20	50	2" 10
066037	SIT25	50	2" 10
066038	SIT30	50	2" 10



Information about SIT-tools on page 19.
Information about TORQ-SET® Mplus can be found on page 87.
Which Wera tool for which screw? See pages 154-157.

ASSY®, piac and SIT = reg. Trademarks of Adolf Würth GmbH & Co. KG, Künzelsau

Wera Series 4 Bits

875/4 TRI-WING® Bits



Application: For TRI-WING®-screws
Drive: 1/4"-hexagon,
Tip: TRI-WING®, professional quality

Code		mm	inch	
066785	1	89	3 1/2"	5
066786	2	89	3 1/2"	5
066787	3	89	3 1/2"	5
066780	4	50	2"	10
066788	4	89	3 1/2"	5
066782	5	50	2"	10
066784	6	50	2"	10

857/4 Z Spanner Bits



Application: For Spanner screws
Drive: 1/4"-hexagon,
Tip: Spanner, professional quality

Code		mm	inch	mm	
057160	4	89	3 1/2"	3,18	10
057161	6	89	3 1/2"	4,32	10
057162	8	89	3 1/2"	5,21	10
057163	10	89	3 1/2"	6,10	10

879/4 Nut Setters



Application: For thread-headed screws
Drive: 1/4"-hexagon,
Tip: Internal thread

Code		mm	inch	mm	
135902	M 6	50	2"	8,0	5
135903	M 8	50	2"	12,0	5
135904	M 10	50	2"	12,0	5



Which Wera tool for which screw? See pages 154-157.

TRI-WING® = reg. Trademark of Phillips Screw Company.

Wera Series 6 Bits



5/16"



**DIN 3126
Form E 8
ISO 1173**

for direct drive in:

**Buckeye-Tools
Demag Pokorny (FMA)
Desoutter
Fiam
Grasso
Rupes
Suhner**



871/6 TORQ-SET® Mplus Bits



Application:
For TORQ-SET® screws,
Drive: 5/16"-hexagon,
DIN 3126-E 8, ISO 1173

Tip: TORQ-SET® Mplus,
similar to ISO 7994,
professional quality

Code	mm	inch	mm	mm	mm
066700	8	35	1 3/8"	6,0	5
066702	10	35	1 3/8"	6,0	5
066704	1/4"	35	1 3/8"	11,0	5

875/6 TRI-WING® Bits



Application:
For TRI-WING® screws
Drive: 5/16"-hexagon,

DIN 3126-E 8, ISO 1173
Tip: TRI-WING®,
professional quality

Code	mm	inch	mm	mm	mm
066790	6	35	1 3/8"	11,0	5
066792	7	35	1 3/8"	11,0	5
066794	8	35	1 3/8"	12,5	5



Information about TORQ-SET® Mplus can be found on page 87.
Information about TRI-WING® is provided on page 87.
Which Wera tool for which screw? See pages 154-157.

TORQ-SET® and TRI-WING® = reg. Trademark of Phillips Screw Company.

Wera Series 19 Bits

5/8"



for direct drive



871/19 TORQ-SET® Mplus Bit



Application: For TORQ-SET® screws

Drive: 5/8"-hexagon, similar DIN 3126-E16

Tip: TORQ-SET® Mplus, similar ISO 7994, professional quality



Code		mm	inch	
066750	1/2"	40	1 9/16"	5
066752	9/16"	40	1 9/16"	5
066754	5/8"	40	1 9/16"	5



Information about TORQ-SET® Mplus can be found on page 87.
 Which Wera tool for which screw? See pages 154-157.

TORQ-SET® = reg. Trademark of Phillips Screw Company.